

H2000

Standing Flower Tower

Specification

(mm)



! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent








✓ P 379058

Registered design

✓ Wp 9324-25

 Made in EU

 36 month warranty

Number of rings 	9	Weight before planting 	124 kg
Capacity 	1168 l	Weight after planting 	600 - 1150 kg 
Total height 	1990 mm	Estimated amount of seedlings 	110 - 130 pieces
Base diameter 	1200 mm	Warranty 	36 months

 Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground



H2000

Standing Flower Tower

Transport (mm)


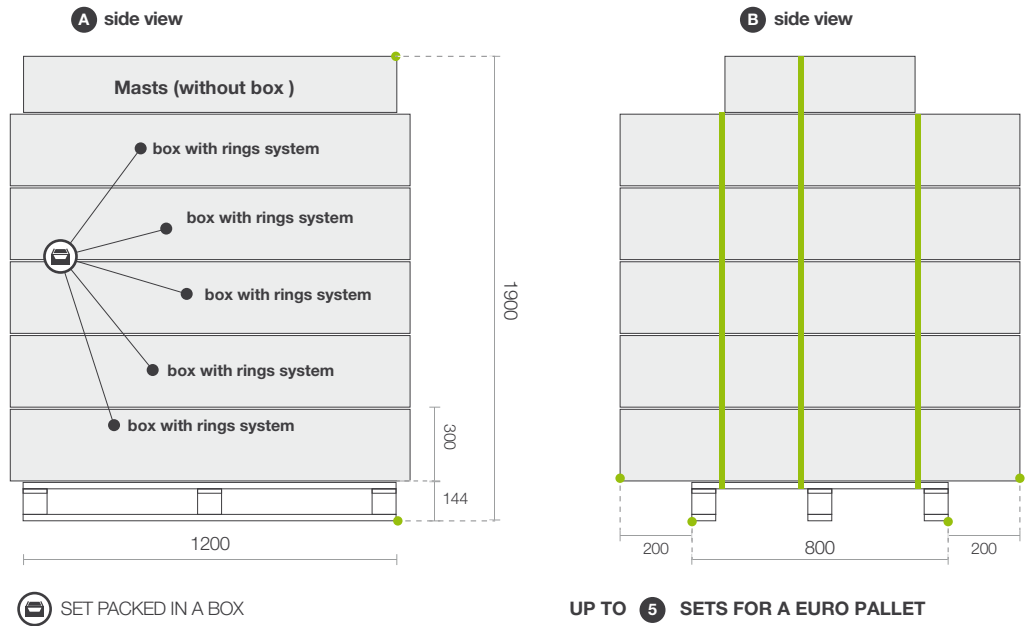


Set content


Lower pan with legs	1 item	Mast (profile 50x50 mm)	1 item
Rings	8 items	Mast (profile 60x60 mm)	1 item
Screw 10x50	18 items	Upper span	4 items
Screw 10x90	8 items	Lower span	4 items
Gasket	30 m	Protective flat bar	2 items
Glue for the gasket	3 items		

Additional accessories

anti-theft system



watering system

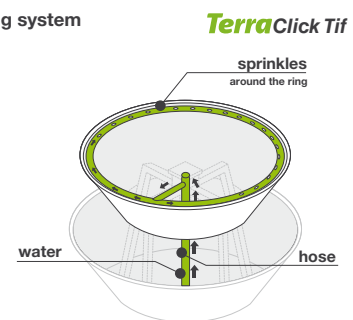

number of lines in the system: 5

type of connector: GEKA

flow of drippers: 2 - 3 l/h

pressure: 0,5 - 4 atm

opening pressure of the anti-drip: 0,4 atm

closing pressure of the anti-drip: 0,2 atm

hose type: **new generation**
resistant to chemicals and acidification

